


## :: Oil Lubrication Equipment ::

- Air Oil Pump
- Air Oil Lubricator
- Mobile Oil Dispensing Kit
- Hand Operated Oil Pump
- Pneumatic Lubricating Accessories



## ➤ 3:1 Air Oil Pump

- Suitable for transferring medium/high viscosity liquid at medium and long distance
- Long useful times easy to maintain
- Suitable for oil up to 120 SAE
- Supplied with 2" pump bung adapter

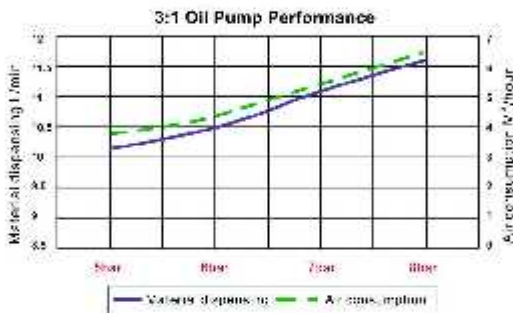


Oil Lubrication Equipment

Model	Drum application	Pressure ratio	Working pressure	Max fluid pressure	Cylinder dia	Air consumption	Max. free flow rate	Suction tube diameter	Suction tube length	Air inlet connection	Oil outlet connector	N.W
VP-102G-TD	20-30Kg	3:1	5-8 bar	24 bar	63 mm	8bar	12L/min	50mm/1.97"	440mm/17"	1.4"	1.2"	5Kg
VP-103G-TD	50-60Kg	3:1	5-8 bar	24 bar	63 mm	8bar	12L/min	50mm/1.97"	740mm/29"	1.4"	1.2"	5.5Kg
VP-104G-TD	180-220Kg	3:1	5-8 bar	24 bar	63 mm	8bar	12L/min	50mm/1.97"	940mm/37"	1.4"	1.2"	6Kg

## ➤ 5:1 Air Oil Pump

- Suitable for transferring medium/high viscosity liquid at medium and long distance
- Long useful times easy to maintain
- Suitable for oil up to 120 SAE
- Supplied with 2" pump bung adapter

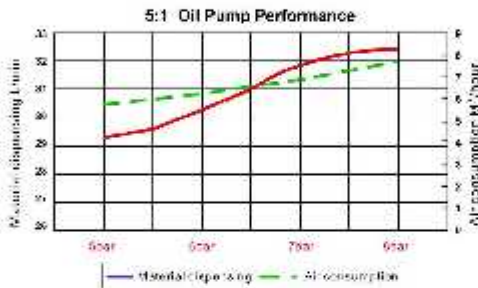


Oil Lubrication Equipment

Model	Drum application	Pressure ratio	Working pressure	Max fluid pressure	Cylinder dia	Air consumption	Max. free flow rate	Suction tube diameter	Suction tube length	Air inlet connection	Oil outlet connector	N.W
VP-620G-TB	20-30Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	440mm/17"	1.4"	1.2"	7Kg
VP-630G-TB	50-60Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	740mm/29"	1.4"	1.2"	7.5Kg
VP-640G-TB	180-220Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	940mm/37"	1.4"	1.2"	8Kg



## ► 5:1 Air Oil Pump

- Suitable for transferring medium/high viscosity liquid at medium and long distance
- Long useful times easy to maintain
- Suitable for oil up to 120 SAE
- Supplied with 2" pump bung adapter

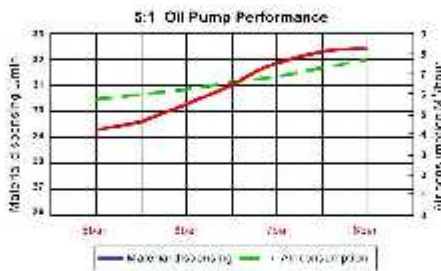

Oil Lubrication Equipment

Model	Drum application	Pressure ratio	Working pressure	Max fluid pressure	Cylinder dia	Air consumption	Max. free flow rate	Suction tube diameter	Suction tube length	Air inlet connection	Oil outlet connector	N.W
VP-102G-TB	20-30Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	440mm/17"	1.4"	1.2"	7Kg
VP-103G-TB	50-60Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	740mm/29"	1.4"	1.2"	7.5Kg
VP-104G-TB	180-220Kg	5:1	5-8 bar	24 bar	108 mm	8bar	34L/min	50mm/1.97"	940mm/37"	1.4"	1.2"	8Kg

### ► Air Oil Lubricator

- Suitable for transferring medium viscosity liquid at medium distance
- Easy to maintain any car or machine equipment
- Composed of hose connecting and digital control meter



Oil Lubrication Equipment

Model	Drum application	Ratio pump	Digital control oil gun	Oil hose	Weight
VP-201G-TB	355x430mm	102G	90203	90901-3	21.3 Kg
VP-231G-TB	355x430mm	102G	90203	90901-3	21.5 Kg
VP-241G-TB	355x830mm	103G	90203	90901-3	22.5 Kg

### ► Air Oil Lubricator

- Suitable for transferring medium viscosity liquid at medium distance
- Easy to maintain any car or machine equipment
- Composed of hose connecting and digital control meter



Oil Lubrication Equipment

Model	Drum application	Ratio pump	Digital control oil gun	Oil hose	Weight
VP-920G-TB	355x430mm	620G	90203	90901-3	21.5 Kg
VP-930G-TB	355x630mm	630G	90203	90901-3	22.5 Kg



### ➤ Mobile Oil Dispensing Kit

- Suitable for mobile equipment of transferring medium distance
- The design of trolley ensures high mobility and high efficiency
- Can meet you demand choose other accessories



**VP-311G-TB**



**VP-321G-TB**



**VP-351G-TB**

Oil Lubrication Equipment

Model	Drum application	Ratio pump	Digital control oil gun	Oil hose	Weight
VP-351G-TB	20-60 Kg	102G	90203	90901-3	22.5 Kg
VP-311G-TB	180-220 Kg	104G	90203	90901-3	70.5 Kg
VP-321G-TB	180-220 Kg	104G	90203	90901-3	33 Kg

### ➤ Mobile Oil Dispensing Kit

- Suitable for mobile equipment of transferring medium distance
- The design of trolley ensures high mobility and high efficiency
- Can meet your demand choose other accessories

VP-730G-TB



VP-720G-TB



VP-740G-TB



Oil Lubrication Equipment

Model	Drum application	Ratio pump	Digital control oil gun	Oil hose	Weight
VP-720G-TB	20-60 Kg	630G	90203	90901-3	22 Kg
VP-730G-TB	180-220 Kg	640G	90203	90901-3	32 Kg
VP-740G-TB	180-220 Kg	640G	90203	90901-3	76 Kg



### ➤ Mobile Oil Dispensing Kit

- Suitable for mobile equipment of transferring medium distance
- The design of trolley ensures high mobility and high efficiency
- Can meet you demand choose other accessories

VP-331G-TD



VP-341G-TD



VP-301G-TD



Oil Lubrication Equipment

Model	Drum application	Ratio pump	Digital control oil gun	Oil hose	Weight
VP-331G-TB	20-60 Kg	102G	90203	90901-3	21 Kg
VP-301G-TB	180-220 Kg	104G	90203	90901-3	31 Kg
VP-341G-TB	180-220 Kg	104G	90203	90901-3	68 Kg

**➤ Hand Operated Oil Pump**

- 25L power coating container
- 2.5Mx1.2" PVC hose
- Capacity approx 130g/stroke
- Weight 10 Kg

**VP-26Q**

### WALL MOUNTED OIL TRANSFER KIT

- Wall mounted kit composed of pump, bracket and hose, suitable for fixed operation
- Suitable for dispensing oil for mobile installations
- A hose reel can be selected



VP-410G-TD

91013

Item No.	TD 410G
Wall mounted pump	TD-101G
Pressure ratio	3:1
Digital control gun	90203
Hose reel	90C
Weight	12kg
Package volume	0.05cbm

### WASTER OIL DRAINER

- Collecting waste oil from different vehicles and washing accessories equipment

Oil Lubrication Equipment



Product name	Item No.
Worm gear	83C-001
Suction hose adapter	83C-002
Pump adapter	83C-003
Suction hose	83C-004
Foot valve	83C-005
Wall bracket	83C-006
Bung adapter	83C-007
Rigid suction tube	83C-008




### COMBINATIVE OIL TRANSFER KIT

- Suitable for specific workplace
- According the length your need, easy to adjust



Item No.	TD-510G
Wall mounted pump	TD-101G
Pressure ratio	3:1
Digital control gun	90203
Connection hose	90901-3
Weight	12kg
Package volume	0.05cbm

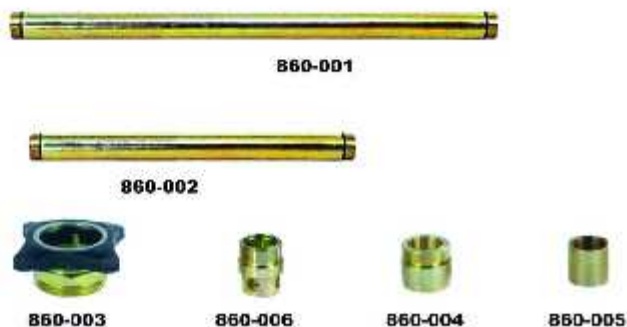

Product name	Item No.
Extension 500mm tube	860-001
Extension 250mm tube	860-002
Bung adapter	860-003
Top connection	860-004
Foot connection	860-005
Foot valve	860-006

### OIL CONTROL VALVE

- Suitable for engine oil, ATF oil, hydraulic oil, automatic transmission oil, anti-freeze liquids and allied products
- Rotary Joints 1 / 2", easy to use, anti-collision switch design
- Anti-drip function, anti-drip muzzle



90201

### OIL CONTROL VALVE

- Suitable for engine oil, ATF oil, hydraulic oil, automatic transmission oil, anti-freeze liquids and allied products
- 5-digit easy to read LCD display powered by one 3V battery, auto power-saving mode
- Rotary Joints 1 / 2", easy to use, anti-collision switch design
- Anti-drip function, anti-drip muzzle



90202

### AIR REGULATOR

- 91011 1/4" inlet & outlet air regulator
- 91015 1/4" inlet & outlet air regulator with water filtering device

91011



91015



90203

90204

## AUTOMATIC HOSE REEL

- Corrosion resistant powder coating
- High quality brass swivel joint
- The inside spring can rebound automatically
- Wall, ceiling or floor mount



Item No.	Application	Hose size	Max. pressure	Out. of	Hose length	Package volume	Weight
924	Drainage	1 1/2"	4000PSI	1 1/4"	15m	50x23x60	20kg
923	W/ hose	3/8"	2250PSI	3/4"	15m	50x23x60	24kg
925	Oil free	1/2"	2000PSI	1/2"	15m	50x23x60	23kg

## 20-60 KG DRUM TROLLEY

- Suitable for 20-60 kg different shapes of drum
- Color zinc plated
- 4 pieces of high quality universal wheels
- Weight: 11kg/24 lb
- 1 piece package



90303A

## OIL HOSE

- Working pressure: 2000 PSI
- 1/2" NPSF female and 1/2" NPT male fitting



90901

Item No.	I.D.	Length(m/ft)	Fitting Type
90901-1	1/2"	2m/7'	Male & Female
90901-2	1/2"	4m/13'	Male & Female
90901-3	1/2"	5m/16'	Male & Female
90901-4	1/2"	8m/26'	Male & Female
90901-5	1/2"	12m/39'	Male & Female
90901-6	1/2"	15m/50'	Male & Female

## 180-220 KG DRUM TROLLEY

- Suitable for 180-220 kg different shapes of drum
- Color zinc plated
- 4 pieces of high quality casters
- Ready to receive a fixed hose reel
- Weight: 41kg
- 1 piece package



90304A

## 180-220 KG DRUM TROLLEY

- Suitable for 180-220 kg different shapes of drum
- Color zinc plated
- 4 pieces of high quality casters
- Weight: 21kg
- 1 piece package



90305A